SLK 7 GEN 2


Miniaturised screwless luminaire connectors



- Super-flat – only 11 mm high and 27 mm wide
- 5 poles for power supply and DALI
- Different fixing and earthing variants

ELECTRO TERMINAL

SLK 7 GEN 2

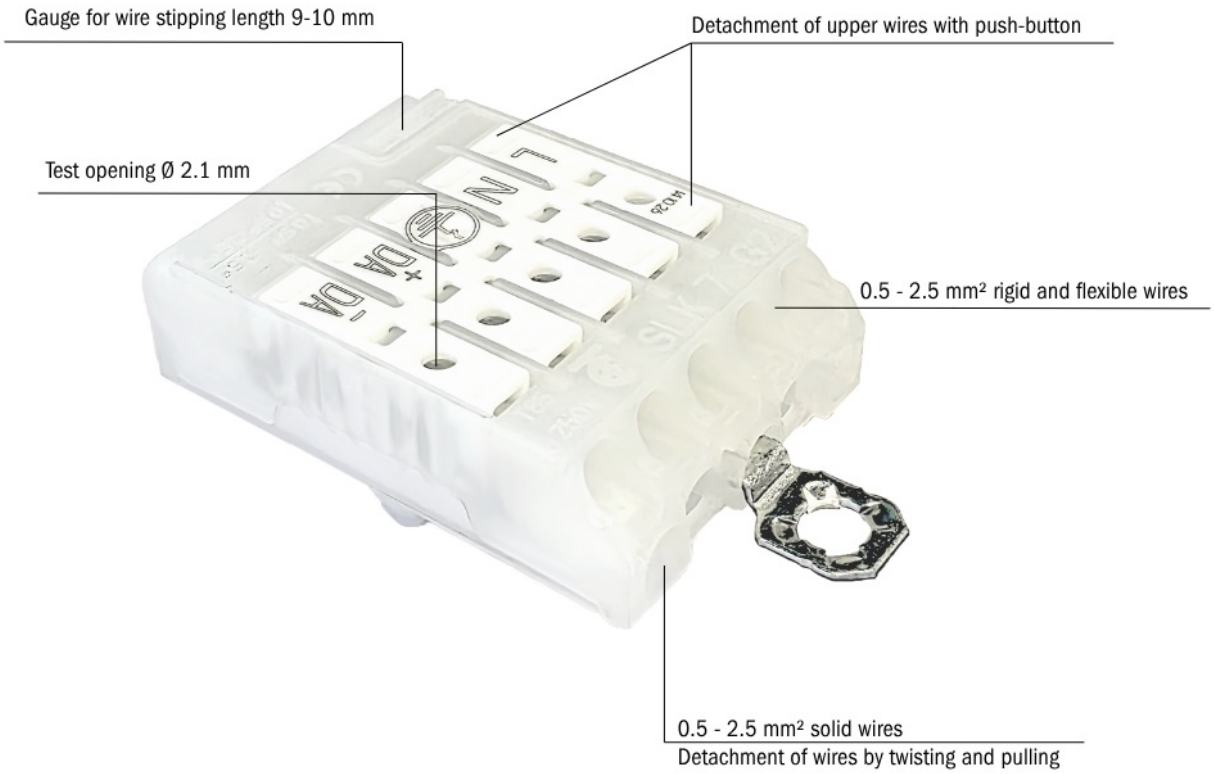
Gauge for wire stipping length 9-10 mm
Detachment of upper wires with push-button
Test opening Ø 2.1 mm
0.5 - 2.5 mm² rigid and flexible wires
0.5 - 2.5 mm² solid wires
Detachment of wires by twisting and pulling

Variants




SLK 7 GEN 2 - ESCHR




SLK 7 GEN 2 - EPIEC





SLK 7 GEN 2 - OF TAPE

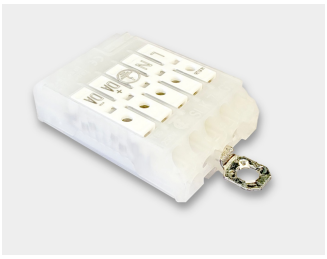


SLK 7 GEN 2 ALP

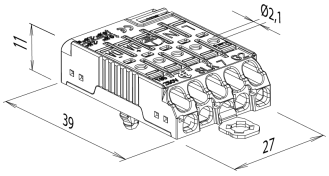

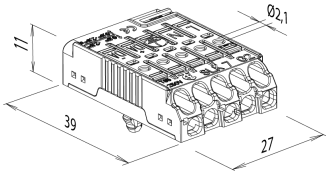


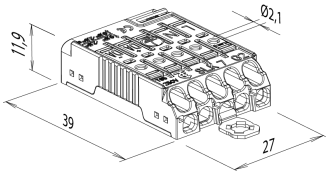

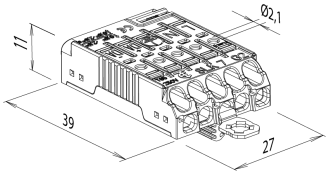


		IEC ratings
Nominal Voltage		400 V (EN 60598)
Nominal Current		16 A
Clamping range	Installation end	0.5-2.5mm² rigid, flexible
	Device end	0.5-2.5mm² solid
Wire stripping length		9-10mm
Max. ambient temperature		T 85
Material	Terminal housing	PA nature
	Push buttons	PC white
	Contact parts	Tinned copper / Stainless steel
	Earth-tags	E-PIEC Bronze
		E-SCHR Tinned steel


Cutouts

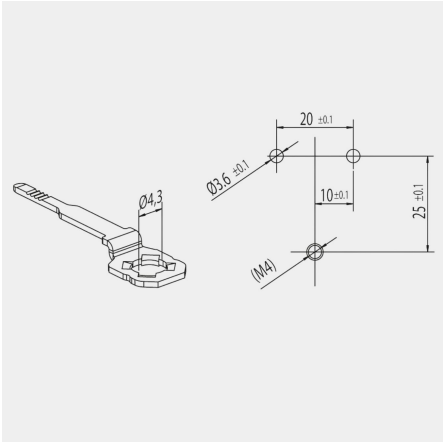

Cutout E-SCHR

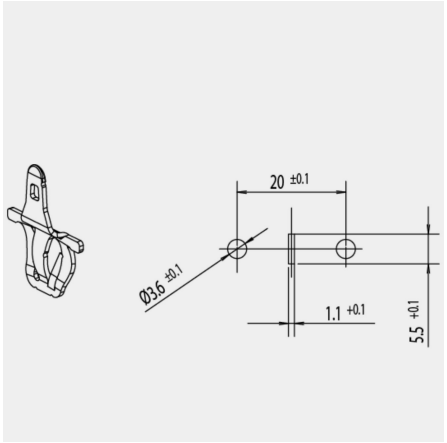

Cutout E-PIEC

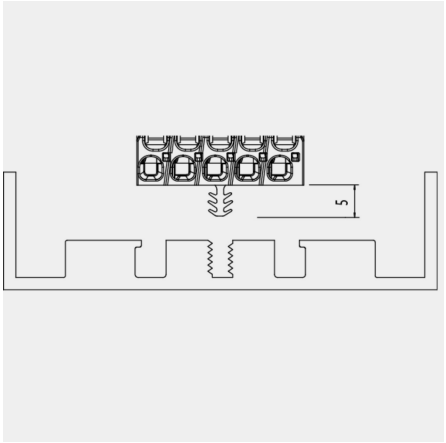

Extruded aluminium profile with M4 thread channe

Art. number	Type	Number of Poles	E _	OF	Printing	Packing / pcs	Weight (pcs./ g)	Box type

Explanation

SLK 7	Miniaturised screwless connector
E _	Additional code for earth-tag
OF Tape	Version without fixing pin but with double-sided adhesive tape
ALP	Version with fixing pin for aluminium profiles
GEN 2	Generation 2

Approvals

OVE Reg.

Electro Terminal GmbH & Co KG
Archenweg 58 | 6020 Innsbruck
Austria
T +43 512 3321
office@electroterminal.com

Legal Form of Company: GmbH & Co KG
Registered Office: Innsbruck

Registered No.: FN 231479k
VAT No.: ATU 56551948

Follow us on: