



LBK 2 CON

Axial connector for LBK 2/11
continuous row-lighting system

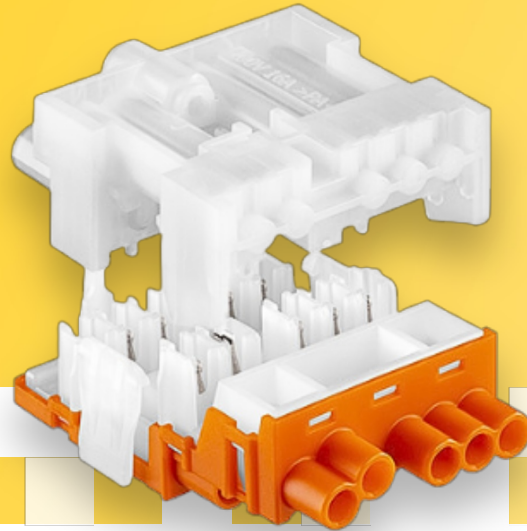

LBK 2/11 CON

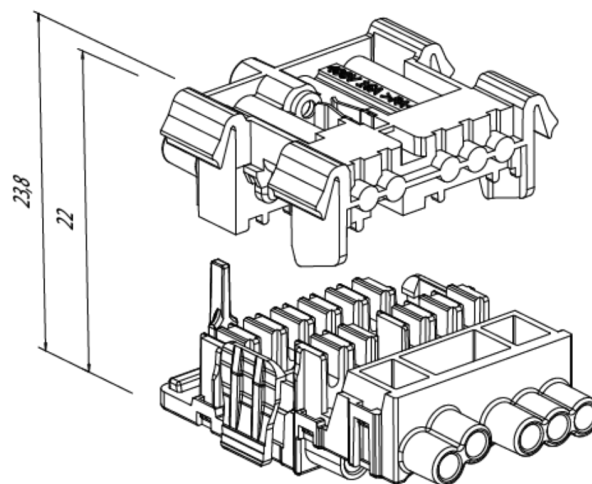

IEC Ratings

Nominal voltage		400 V
Nominal current		2.5mm²: 16 A 1.5mm²: 5x 16 A & 6x 10 A
Clamping range		1.5-2.5mm² solid
Wire stripping length		15-16mm
Upper limit temperature(ULT)		105°C
Material	Terminal housing	PA 66/PC
	Contact part	Tinned copper alloy, stainless steel


Art. number	Type	KU / ST	Number of Poles	E _	Packing / pcs	Weight (pcs./ g)	Box type
88168413	LBK 2/11 CON KU 11POL	KU	11		400	24.0	380 x 280 x 260 mm
88168414	LBK 2/11 CON KU 9POL	KU	9		400	20.4	380 x 280 x 260 mm
88168415	LBK 2/11 CON KU 7POL	KU	7		400	20.7	380 x 280 x 260 mm
88168416	LBK 2/11 CON KU 5POL	KU	5		400	19.1	380 x 280 x 260 mm
88168417	LBK 2/11 CON ST 11POL	ST	11		400	10.9	300 x 250 x 300 mm
88168419	LBK 2/11 CON ST 11POL E	ST	11	E	400	24.0	300 x 250 x 300 mm

Explanation

LBK 2/11	Type designation
CON	Axial connector
KU	Female part
ST	Male part
E	Version with earth tag
PA	Polyamide

Approvals



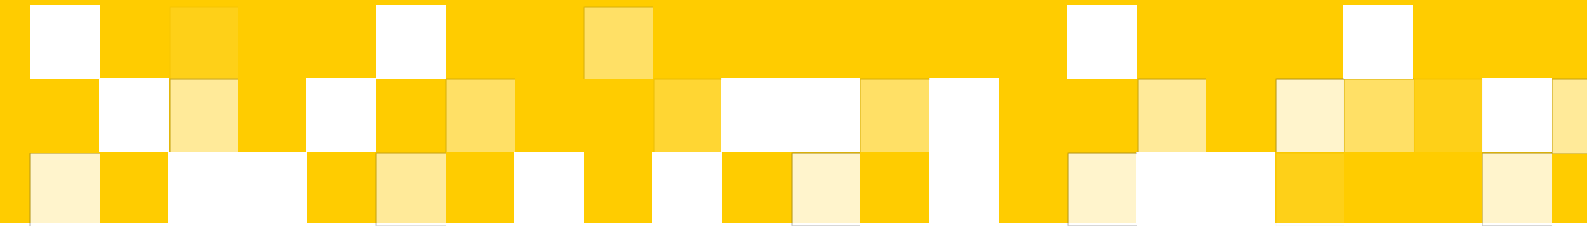

Electro Terminal GmbH & Co KG
Archenweg 58 | 6020 Innsbruck
Austria
T +43 512 3321
office@electroterminal.com

Legal Form of Company: GmbH & Co KG
Registered Office: Innsbruck

Registered No.: FN 231479k
VAT No.: ATU 56551948

Follow us on:



ELECTRO 
TERMINAL