

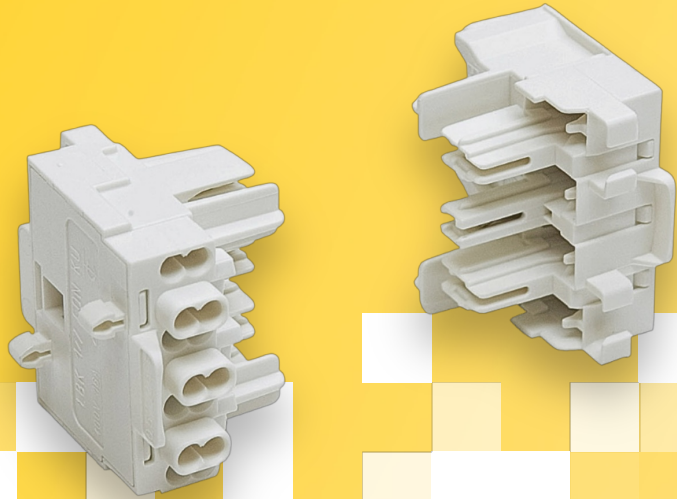


LBK 1-7 CON


Axial connector for continuous
row-lighting system LBK 1/7

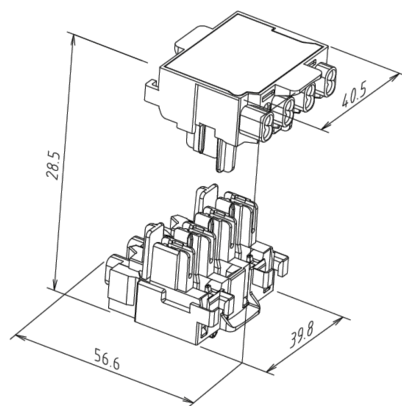

LBK 1/7 CON

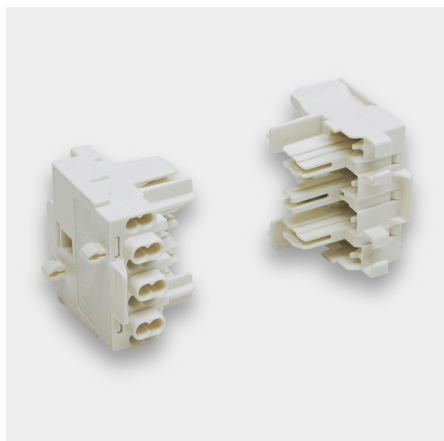

LBK 1/7 CON KU

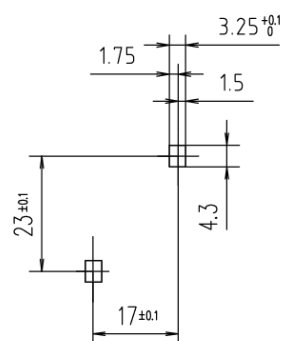

Cutout | Plate thickness 0.5 - 1.4 mm

IEC Ratings

Nominal voltage	400 V
Nominal current	16 A
Clamping range	2x 0.5-2.5mm ² solid
Wire stripping length	12-13mm
Upper limit temperature (ULT)	105°C
Lower limit temperature (LLT)	-20°C
Material	Terminal housing: PA 66
	Contact parts: Tinned brass


Art. number	Type	Number of Poles	KU / ST	OF	Packing / pcs	Weight (pcs./ g)	Box type
88716212	LBK 1/7 CON KU D1-D2	7	KU		400	18.0	325 x 255 x 280 mm
88716187	LBK 1/7 CON ST OF D1-D2	7	ST	OF	400	18.2	325 x 255 x 280 mm

Explanation

LBK 1	Component for continuous row-lighting system
CON	Axial connector
KU	Female part
ST	Male part
OF	Version without fixing pin
PA	Polyamide

Approvals



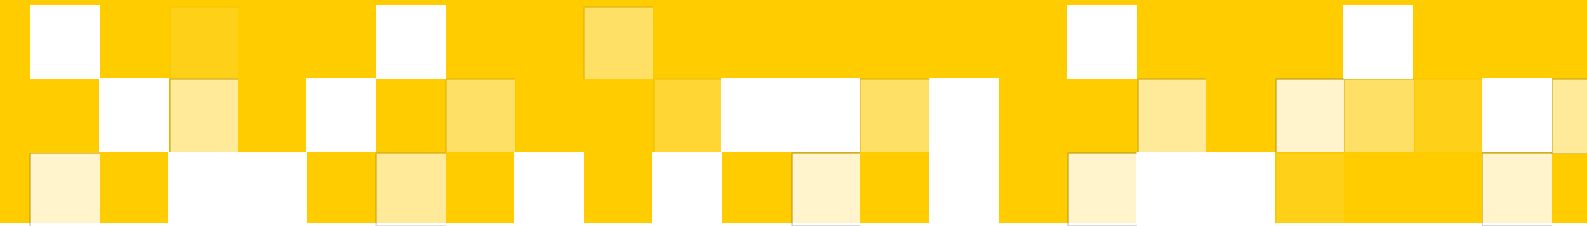

Electro Terminal GmbH & Co KG
Archenweg 58 | 6020 Innsbruck
Austria
T +43 512 3321
office@electroterminal.com

Legal Form of Company: GmbH & Co KG
Registered Office: Innsbruck

Registered No.: FN 231479k
VAT No.: ATU 56551948

Follow us on:



ELECTRO 
TERMINAL