

SLK X SKII

Miniaturised screwless luminaire connectors with reinforced insulation for protection class II applications



- Reinforced insulation for protection class II applications
- Same cutout as SLK 5
- Compact dimensions
- Suitable for strain relief BFP ZUG SLK 7 & BFP ZUG OF

SLK X SKII

Gauge for wire stripping length


Easy detachment of upper wires with push-button

Test opening $\varnothing 2.1 \pm \text{mm}$

0.5 – 2.5 mm² rigid wires,
rigid stranded wires, flexible wires

0.5 – 2.5 mm² (rigid wires)
1.5 – 2.5 mm² (solid stranded wires)

Detachment of wires with release pin and by
twisting and pulling.

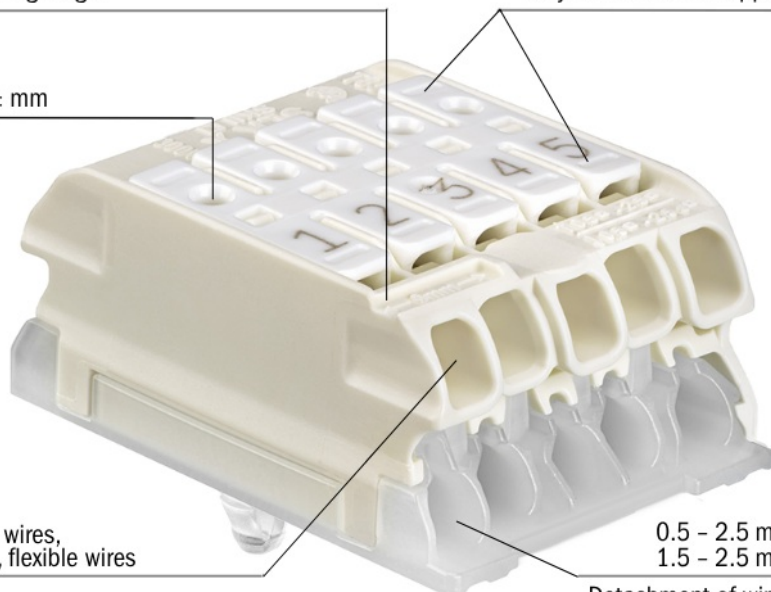

Variants



SLK X SKII



SLK X SKII OF


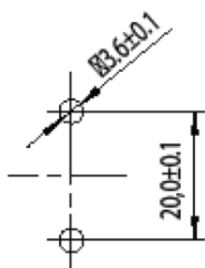


Plate cut-out: View luminaire inside | Thickness - Mounting surface: 0.5 - 1.2mm

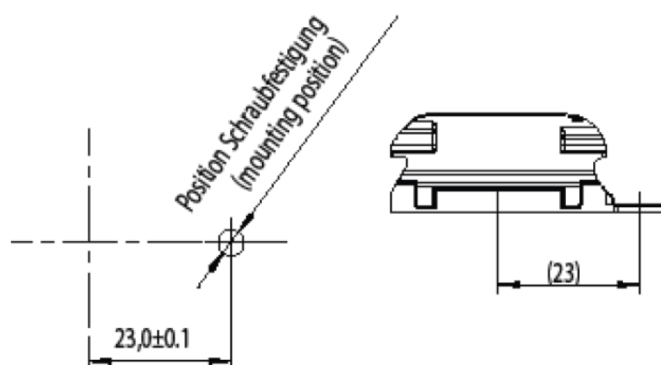


Plate cut-out: View luminaire inside | Tab hole diameter: 4mm | Recommended screw type: Flat head or round head screw

		IEC ratings
Nominal Voltage		300 V
Nominal Current		24 A
Clamping range	Upper terminals	0.5-2.5mm ² solid, rigid stranded, flexible
	Lower terminals	0.5-2.5mm ² solid, 1.5-2.5mm ² rigid stranded
Wire stripping length		9-10mm
Max. ambient temperature		T 85
Material	Terminal housing	PA66 beige
	Cover	PC white
	Contact parts	Tinned copper


Art. number	Type	Number of Poles	OF	Printing	Packing / pcs	Weight (pcs./ g)
88168816	SLK X/5OF SKII 1-2-3-4-5	5	OF	1 2 3 4 5	400	14.0
88168817	SLK X/5 SKII 1-2-3-4-5	5		1 2 3 4 5	400	14.0

Explanation

Approvals

SLK X	Screwless connector
SK II	Additional code for reinforced insulation
OF	Variation without fixing pins
empty	Version with fixing pins



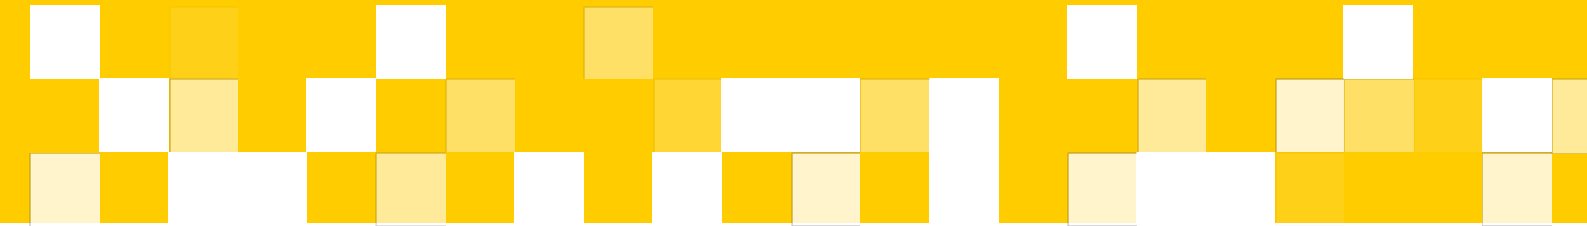

Electro Terminal GmbH & Co KG
Archenweg 58 | 6020 Innsbruck
Austria
T +43 512 3321
office@electroterminal.com

Legal Form of Company: GmbH & Co KG
Registered Office: Innsbruck

Registered No.: FN 231479k
VAT No.: ATU 56551948

Follow us on:



ELECTRO 
TERMINAL