





FKL

Screw-tab terminal blocks

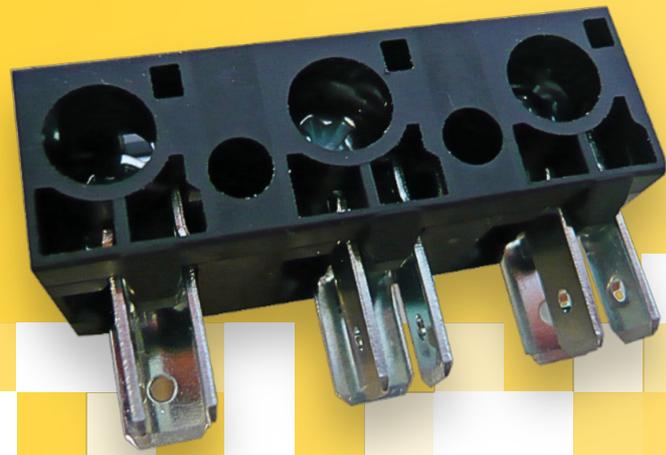

- Available up to 12 poles
- 3 fastons or 2 fastons version possible

FKL

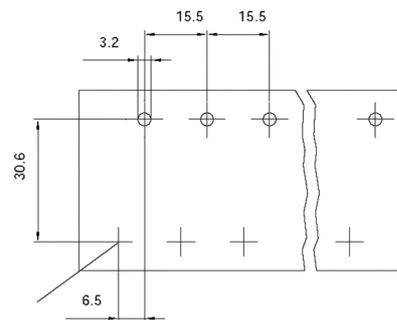

Cutout | Position for earth cutout

	IEC Ratings	UL Ratings	
Nominal voltage	450 V	600 V	
Nominal current	24 A		
Clamping range	2.5mm ²		
Wire stripping length	13-14mm		
Max. ambient temperaturwe	T 125 T65 (UL)	T65	
Material	Punched parts	Galvanized steel	
	Screws	Galvanized steel M4	7.0 in-lbs
	Terminal housing	PA 66 black	
Fastons	0.8 × 6.3mm according to EN 61210		
Ratings according to EN 60335-1			
Nominal voltage	400 V		
Pollution degree	3 (FKL1 *GV* Types only)		
Glow wire test	GWT 750°C / GWIT 775°C		
Tightening torque	PH2 - 1,2Nm		

Art. number	Type	Number of Poles	Position of twist protection	Printing	Packing / pcs	Weight (pcs./ g)	Box type
88505901	FKL 1/2G Z1 L1-N	2	Z1	L1-N	500	11.3	325 x 180 x 280 mm
88168836	FKL 1/3G Z12 2FZ V0 ERDE-N-L	3	Z12	ERDE-N-L	500	16.7	325 x 180 x 280 mm
88160928	FKL 1/3G Z12 O.GRAV	3	Z12		500	16.7	325 x 180 x 280 mm
88160929	FKL 1/5G Z1234 L1-L2-L3-N-ERDE	5	Z1234	L1-L2-L3-N-ERDE	300	27.8	325 x 180 x 280 mm

2-12 poles upon request


Earth-tag and terminal bridges upon request

Explanation

FKL Screw-tab terminal block
PA Polyamide

Approvals



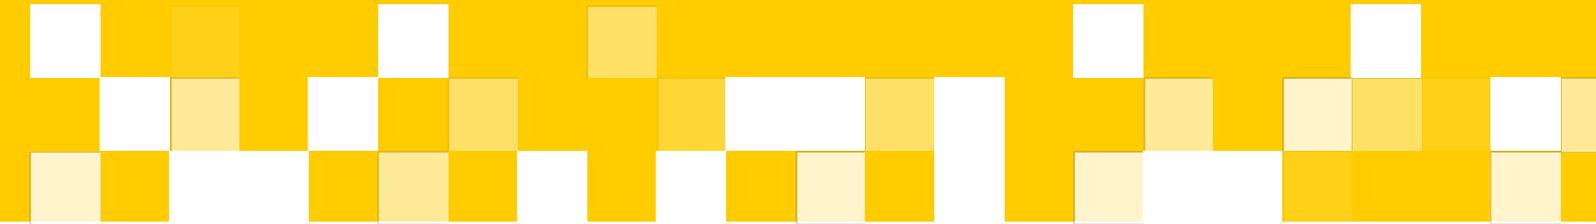

Electro Terminal GmbH & Co KG
Archenweg 58 | 6020 Innsbruck
Austria
T +43 512 3321
office@electroterminal.com

Legal Form of Company: GmbH & Co KG
Registered Office: Innsbruck

Registered No.: FN 231479k
VAT No.: ATU 56551948

Follow us on:



ELECTRO 
TERMINAL