

SLK 3 LINECT

Power supply connectors for light fittings with interface



- Safe and easy connection with conventional installation wires as well as with connector plugs
- Useable for automatic wiring on all common automatic push-in wiring Systems
- Wire release at device end with release pin from the top
- Wire release on the installation end with push-button
- Compatible with all linect® approved connection Systems

SLK 3 LINECT

Variants



SLK 3/2 LINECT







SLK 3/3 LINECT





SLK 3/4 LINECT



SLK 3/5 LINECT

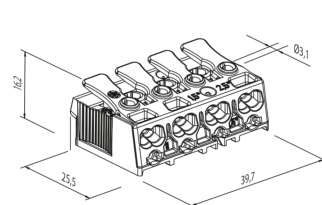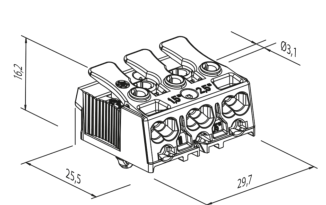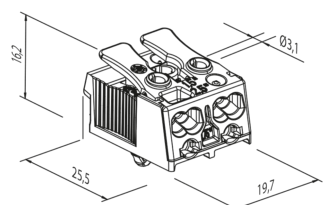

		IEC ratings	UL ratings
Nominal voltage		450 V	600 V
Nominal current		24 A	16 A
Clamping range	Installation end	2x 0.5-2.5mm ² solid, 2x 0.75-2.5mm ² rigid stranded 2x 1.5-2.5mm ² flexible	CU, AWG 20 – 14 (SOL)
Clamping range	Device end	1x 0.5-1.5mm ² solid 1x 0.5-2.5mm ² solid 1x 0.75-1.5mm ² rigid stranded 1x 0.75-2.5mm ² rigid stranded 1x 0.5-0.75mm ² solid	CU, AWG 20 – 14 (SOL CU, AWG 20 – 18 (SOL)
Wire stripping length		0.5-1mm ² - 8-9mm 1.5-2.5mm ² - 9-10mm	
Max. ambient temperature		T85	
Material	Terminal housing	PC white	
	Contact parts	Tinned copper	
	Earth tag	E-PIEC Bronze	
		E-SCHR Tinned steel	

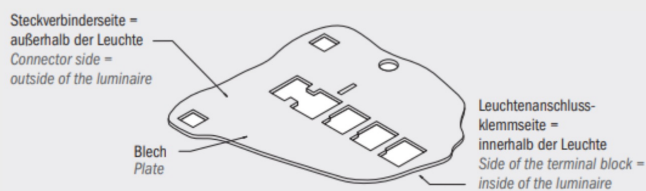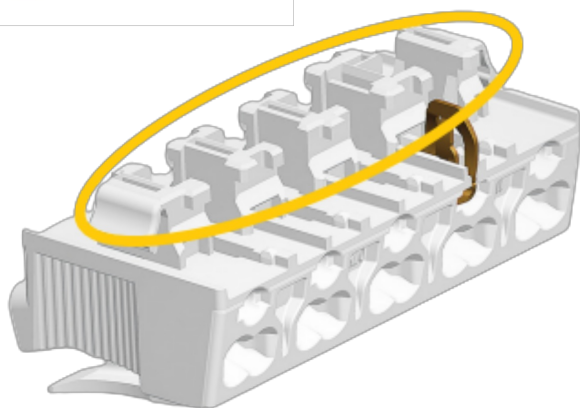

Blechstärke von 0,4 mm (blank) bis zu 1 mm inkl. Lack
Plate thickness from 0.4 mm (blank) up to 1 mm incl. varnish

SLK LINECT with E-PIEC must not be used for aluminium sheets!

Dimensioned cutout drawings upon request.


Art. number	Type	Number of Poles	Printing	Packing / pcs	Weight (pcs./ g)	Box type
88168738	SLK 3/3 LINECT N-E(SCHRIFT)-L	3	N E L	750	8.7	325 x 180 x 280 mm
88168739	SLK 3/5 LINECT DA+-DA--L-E(SCHRIFT)-N	5	DA+ DA- - L E	450	14.3	325 x 180 x 280 mm

Explanation

SLK 3 LINECT Screwless connector with linect® interface
E... Additional code for earth-tag
PC Polycarbonate

Approvals



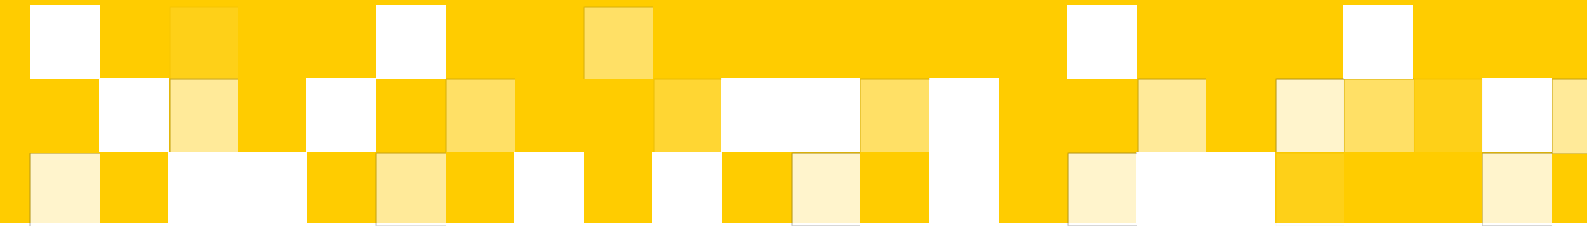

Electro Terminal GmbH & Co KG
Archenweg 58 | 6020 Innsbruck
Austria
T +43 512 3321
office@electroterminal.com

Legal Form of Company: GmbH & Co KG
Registered Office: Innsbruck

Registered No.: FN 231479k
VAT No.: ATU 56551948

Follow us on:



ELECTRO 
TERMINAL